



RADIO EMISSION ELECTROMAGNETIC FIELD (EMF) SPOT MEASUREMENTS

Under the Communications Act 2006, the GRA is responsible for the management of the radio spectrum in Gibraltar. This includes ensuring that all licensed and licence-exempt radio transmitters comply with guidelines adopted by the International Commission on Non-Ionizing Radiation Protection (“ICNIRP”). This standard has been adopted by His Majesty’s Government of Gibraltar and provides the basis by which the GRA measures the power levels in respect of electromagnetic fields (“EMF”), emitted by the various transmitters around Gibraltar. These transmitters include mobile telephony antennas, radio and TV transmitters, as well as fixed communication links which connect multiple sites via radio.

EMFs are measured in units called volts per meter (“V/m”) and the higher the measurement, the stronger the EMF. For preliminary site audits, the GRA conducts measurements at locations with clear line of sight to known sources of EMF such as mobile base stations. The location nearest these sources that are accessible by the public is chosen as a starting point. If the measured levels are high but still within the ICNIRP guidelines, a subsequent test is conducted as close as practicable to the transmitter to ensure compliance. If the levels are in excess of the ICNIRP guidelines, the operators in the area are notified immediately to power off so that a detailed investigation using high end spectrum analysers can be conducted in the area.

Initial measurements are taken using a SMP2 “Electromagnetic Meter” with a WPF40 probe (antenna). In line with ICNIRP recommendations, the SMP2 is pre-programmed to measure all frequencies in the tuneable range of the probe (20 MHz – 40 GHz¹) for a period of 6 minutes.

The ICNIRP standard upper limit for the frequency range 20 MHz to 40 GHz is 27.5 V/m and this denotes a level under which EMF is considered compliant. For ease of reference, the SMP2 displays the information as a percentage of field strength compared to the ICNIRP guidelines denoted by %E where “E” is electric field strength in V/m. i.e. a value of 10%E = 2.75 V/m. The final result is the average of over 2000 measurements taken over a sample period of 6 minutes.

Please note that the radio spectrum is continually changing, and these measurements only provide information on the radio frequency conditions for the specific locations at the time of monitoring.

The GRA will endeavour, subject to workloads and the availability of appropriate resources, to carry out and report EMF spot measurements on a weekly basis.

For further information, please visit the GRA website at <https://www.gra.gi/communications/spectrum-use/emf-monitoring>

¹ The frequency range 20 MHz – 40 GHz encompasses all radio spectrum currently used in Gibraltar for mobile telephony as well as broadcasting TV/Radio stations, Radar, WiFi and other commonly used technologies.

Site Audit Conclusion: 17/APR/2023

Measurements conducted reflect the EMF at the prevailing locations were all well within the ICNIRP guidelines. No follow up investigation in the locations below was required.

Location	Date	Average Measurement	
Albert Risso House	14/04/2023	1.413	%E
DTR Carpark	14/04/2023	1.657	%E
Caleta Palace	14/04/2023	0.949	%E
Dudley Ward Tunnel	14/04/2023	21.05	%E
Buffadero (West)	14/04/2023	1.590	%E
Buffadero (East)	14/04/2023	0.655	%E
Sunnyside House	14/04/2023	1.960	%E
Rock Hotel	14/04/2023	0.473	%E
New Harbours	14/04/2023	5.534	%E
Atlantic Suites	17/04/2023	0.954	%E
ICC	17/04/2023	5.363	%E
Law Courts	17/04/2023	5.168	%E
Haven	17/04/2023	5.905	%E



WAVECONTROL

Safety, Quality, Service

Measurement information

Location	Albert Risso House
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 14:42:12.0
Final time	14/04/2023 14:48:12.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	1.413
Maximum	12.31
Minimum	0



Screenshot

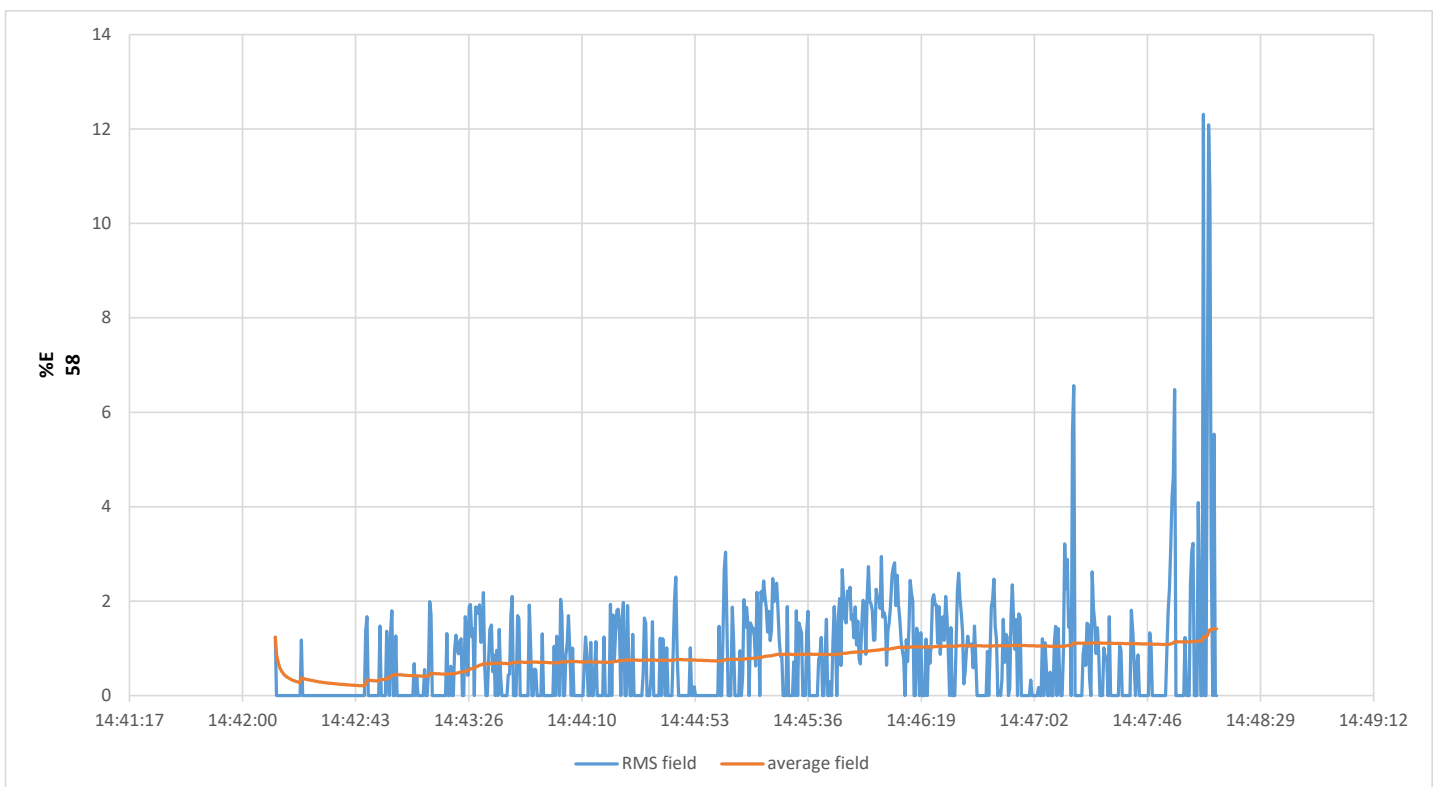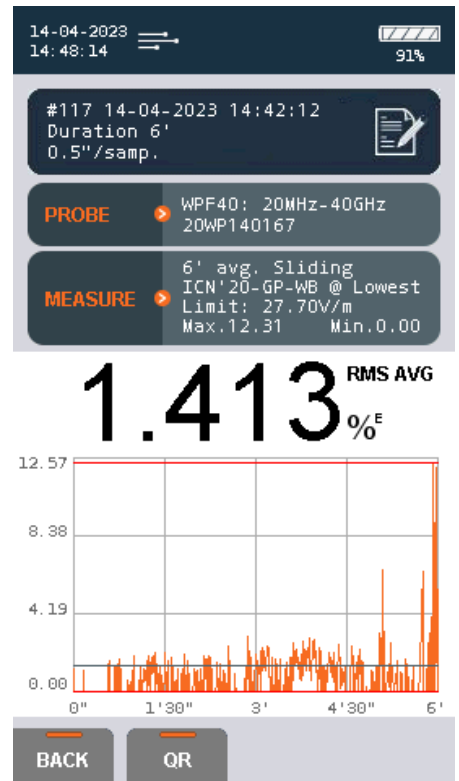

Measurement information

Location	DTR Carpark
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 14:24:40.0
Final time	14/04/2023 14:30:40.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	1.657
Maximum	23.44
Minimum	0



Screenshot

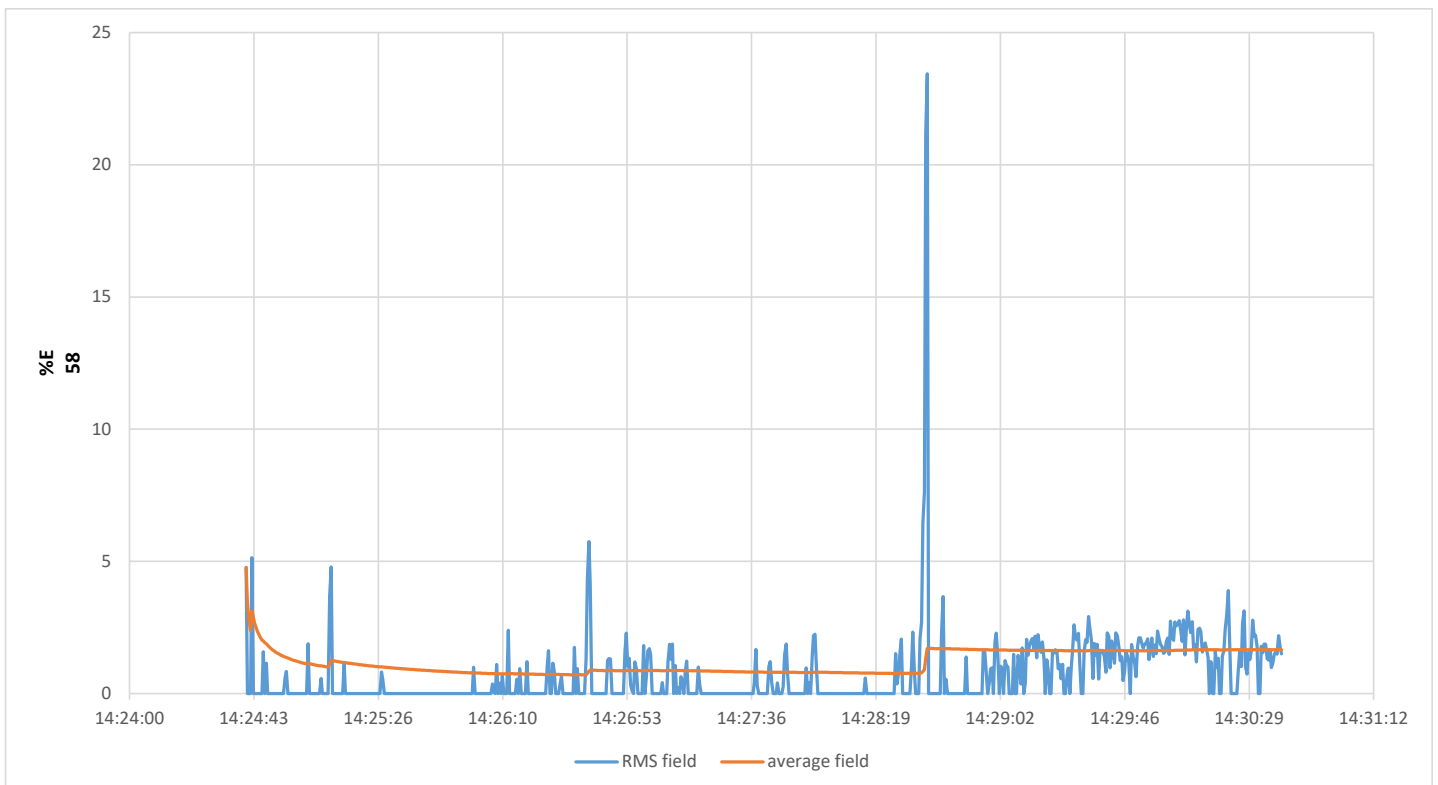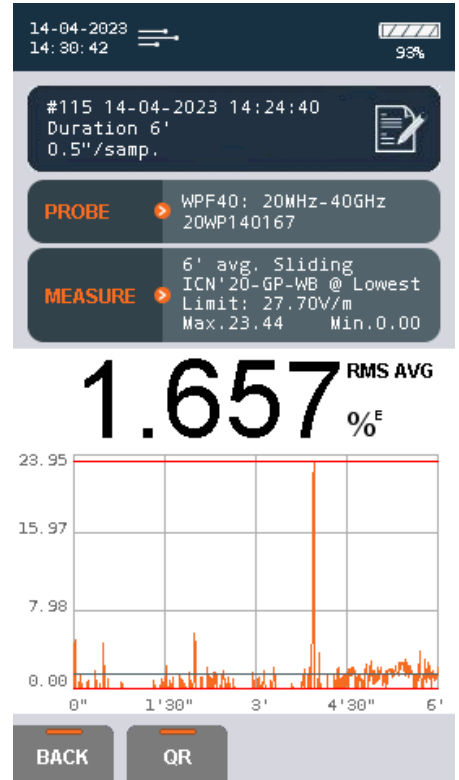

Measurement information

Location	Caleta Palace
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 14:09:26.0
Final time	14/04/2023 14:15:26.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	0.9488
Maximum	7.563
Minimum	0



Screenshot

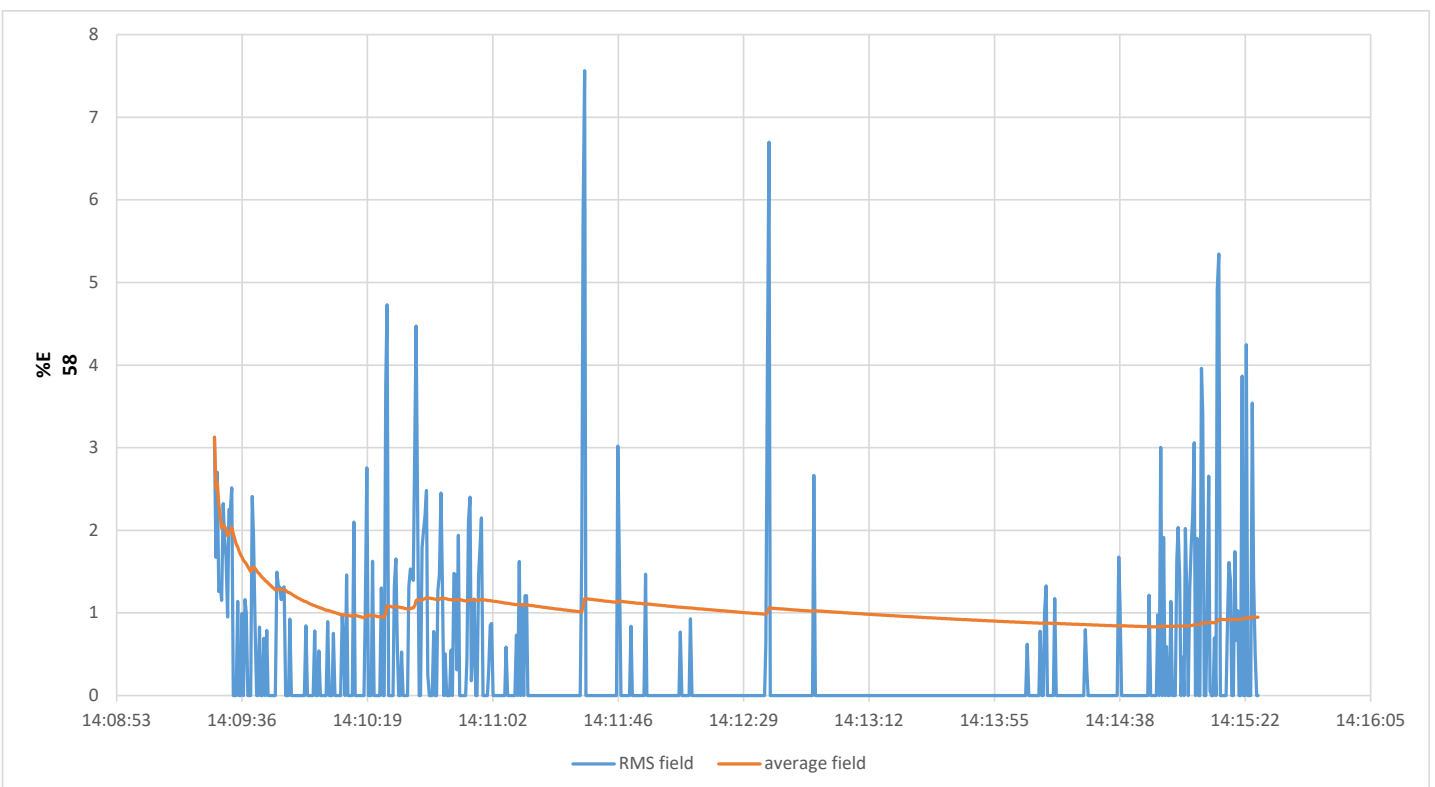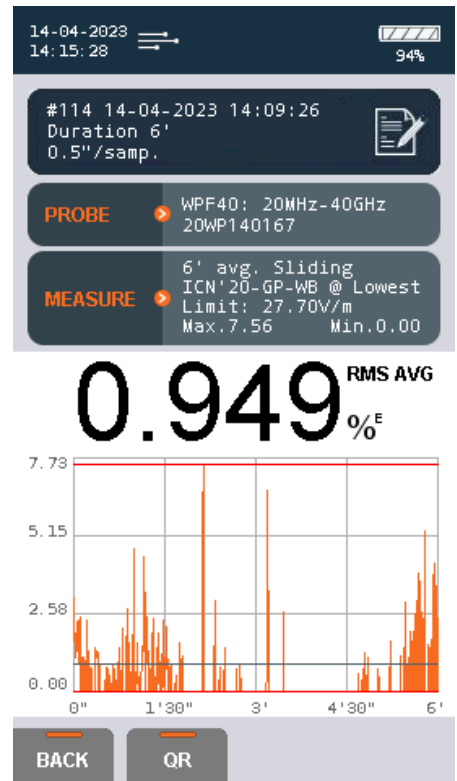

Measurement information

Location	Dudley Ward Tunnel
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 13:49:21.0
Final time	14/04/2023 13:55:21.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	21.05
Maximum	39.95
Minimum	5.689



Screenshot

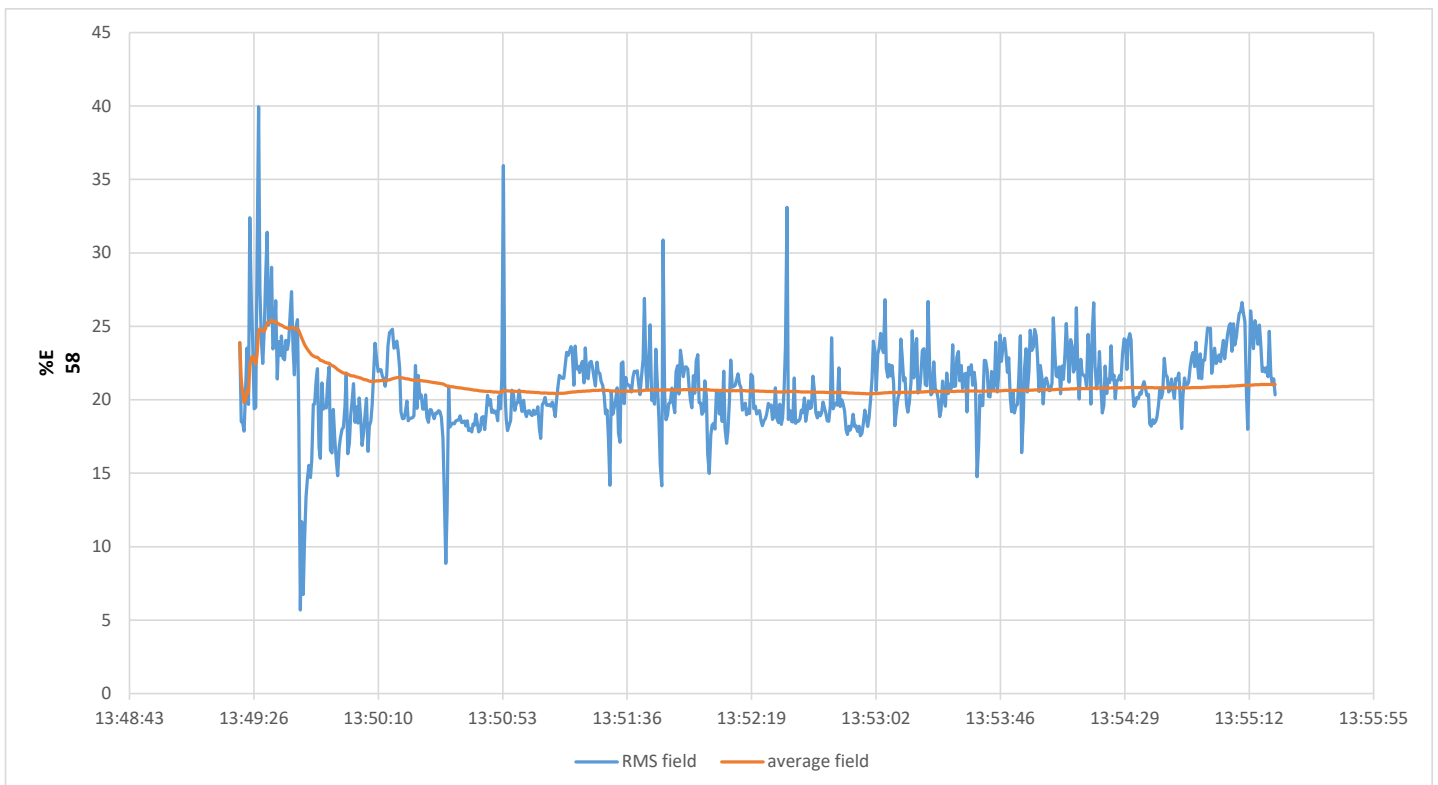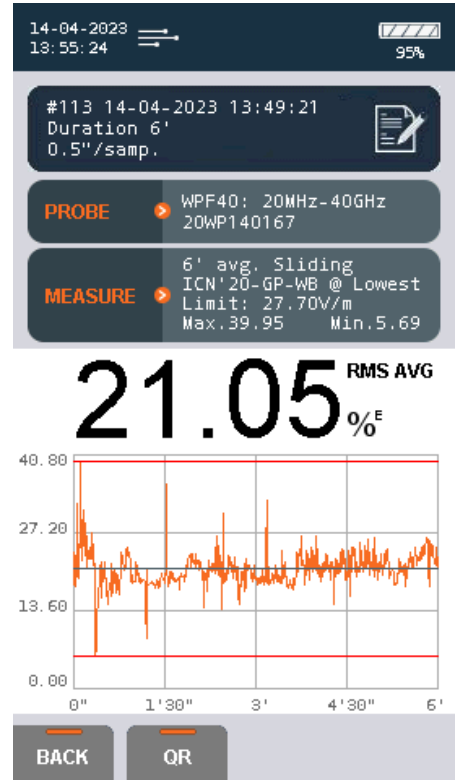

Measurement information

Location	Buffadero West
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 13:32:39.0
Final time	14/04/2023 13:38:39.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	1.59
Maximum	22.52
Minimum	0



Screenshot

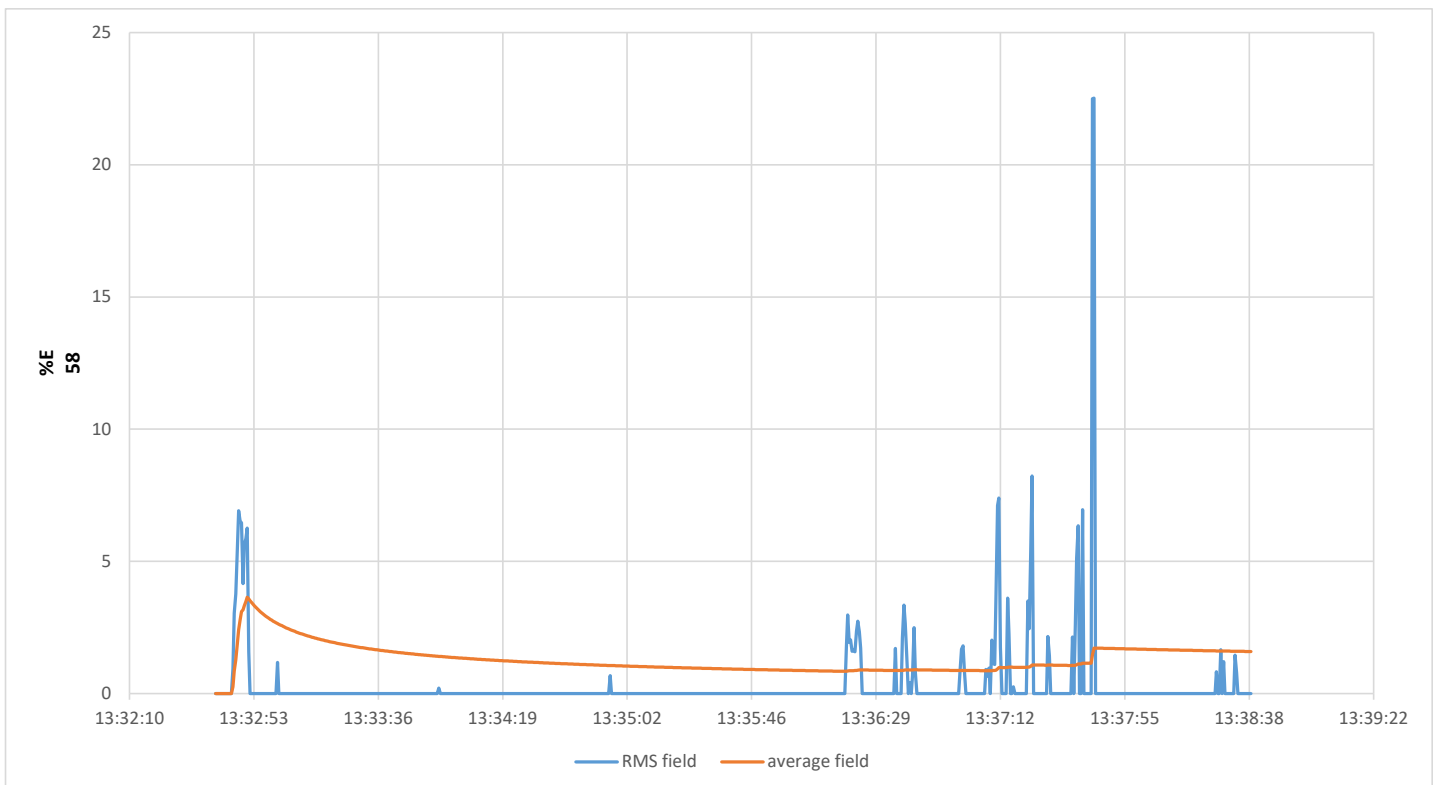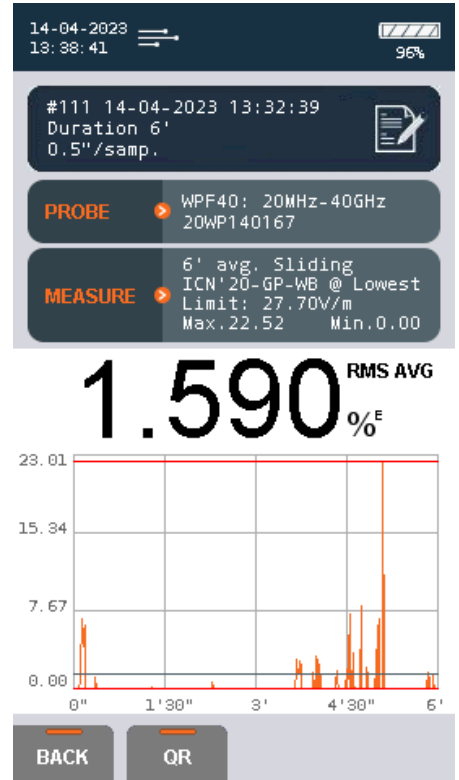

Measurement information

Location	Buffadero East
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 13:23:51.0
Final time	14/04/2023 13:29:51.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	0.6549
Maximum	6.346
Minimum	0



Screenshot

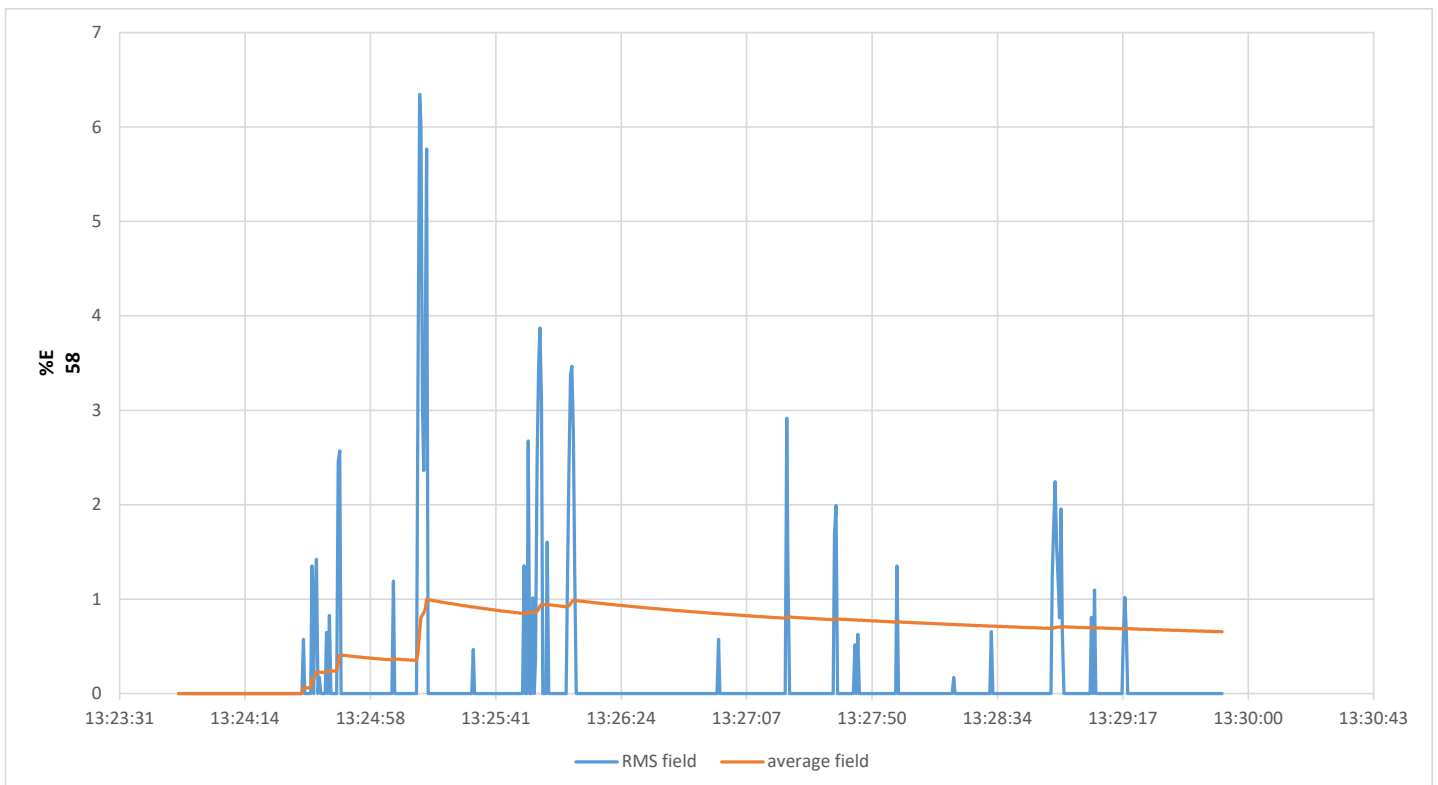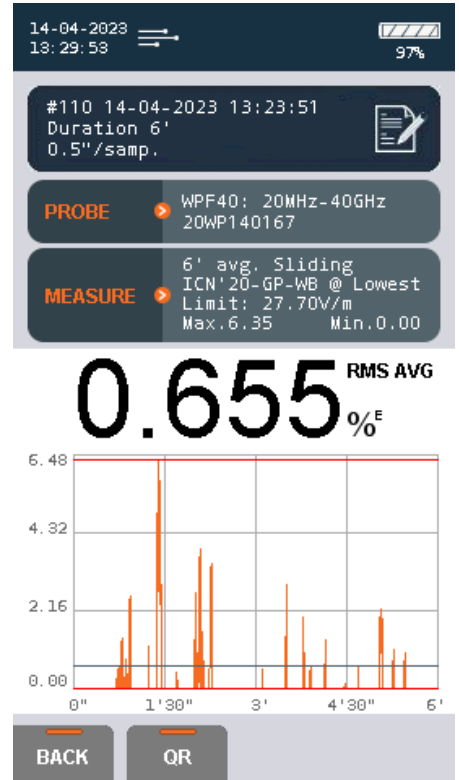

Measurement information

Location	Sunnyside House
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 13:12:21.0
Final time	14/04/2023 13:18:21.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	1.96
Maximum	15.42
Minimum	0



Screenshot

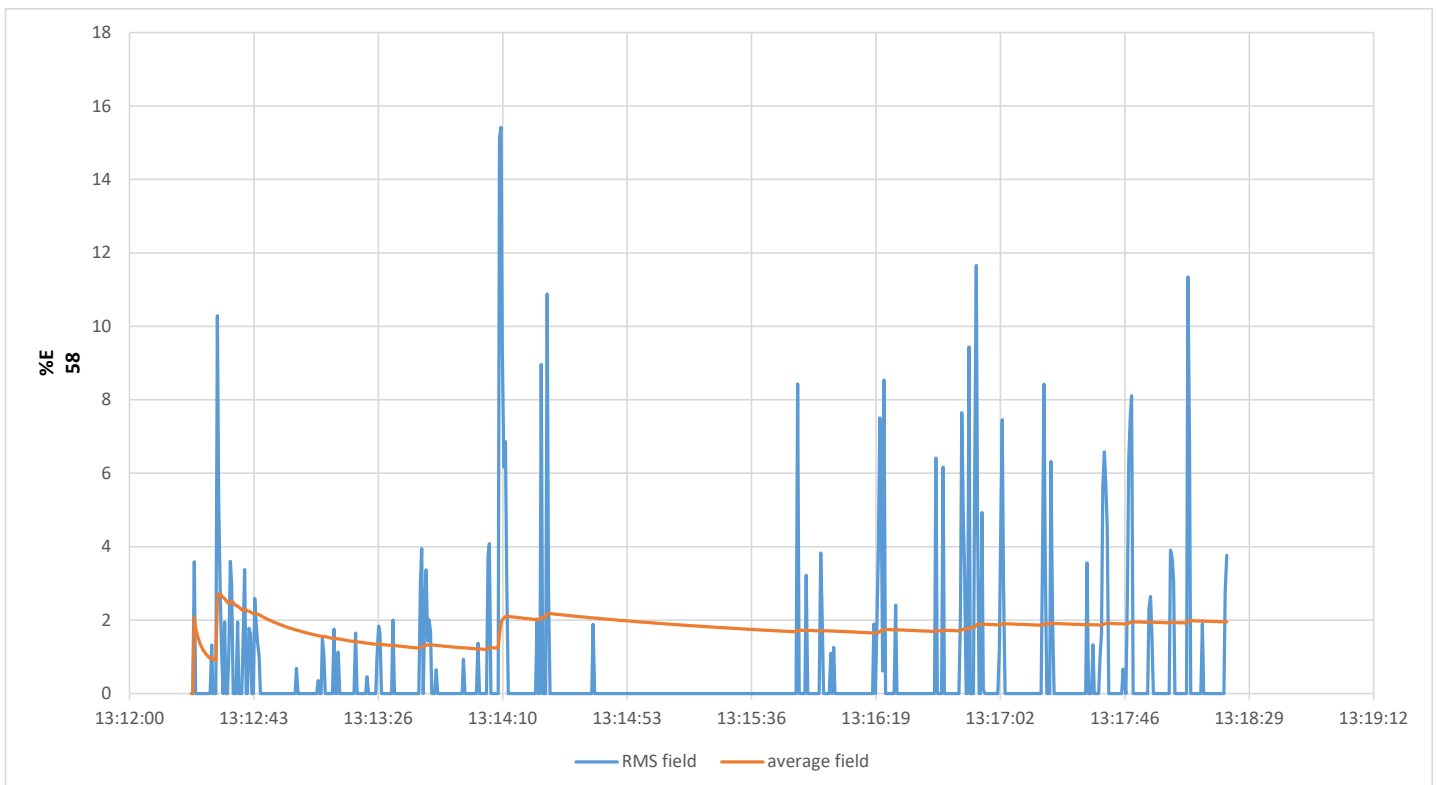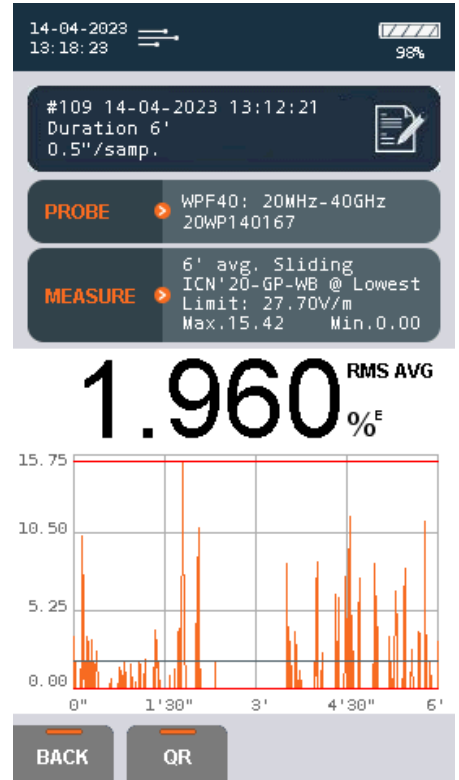

Measurement information

Location	Rock Hotel
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 13:02:07.0
Final time	14/04/2023 13:08:07.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	0.4728
Maximum	4.006
Minimum	0



Screenshot

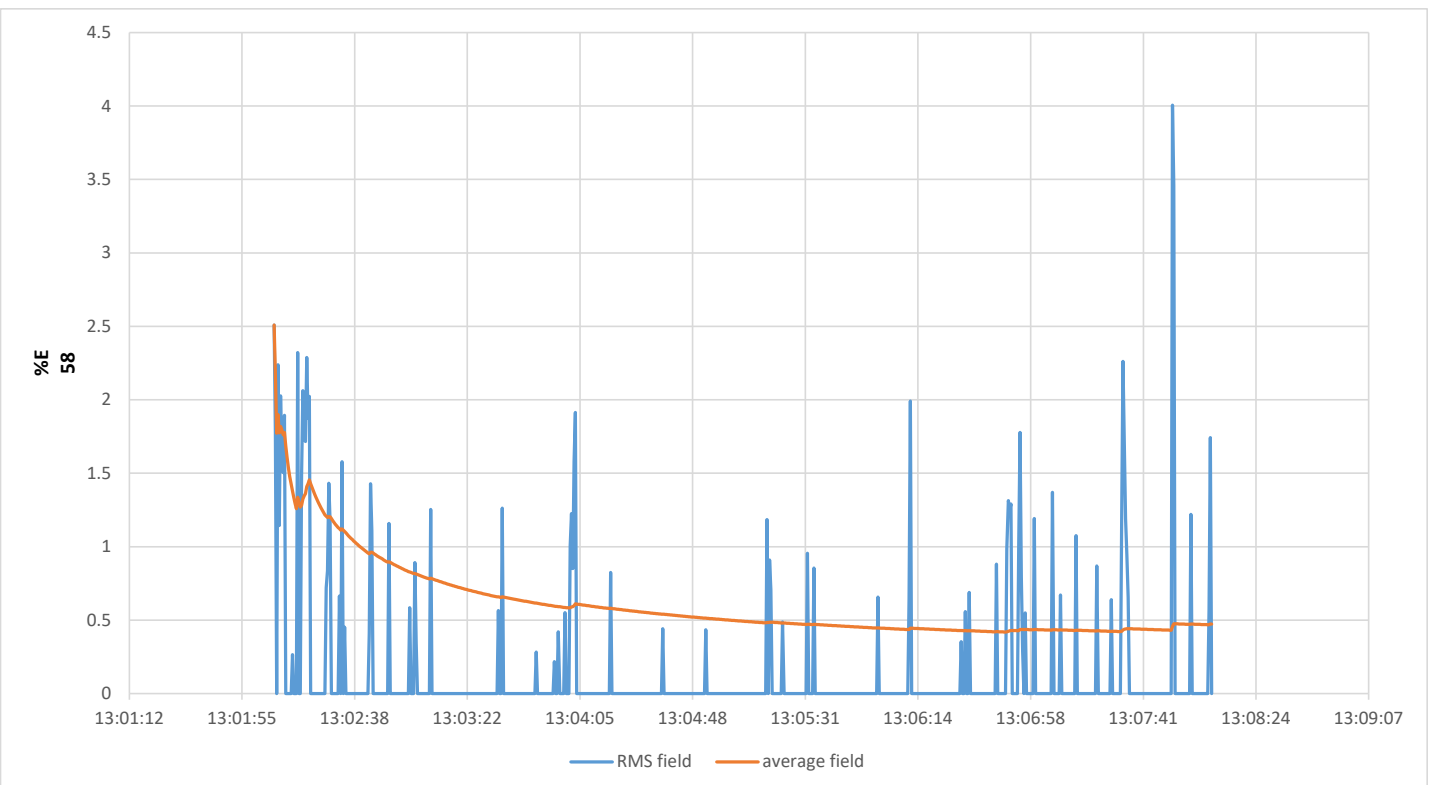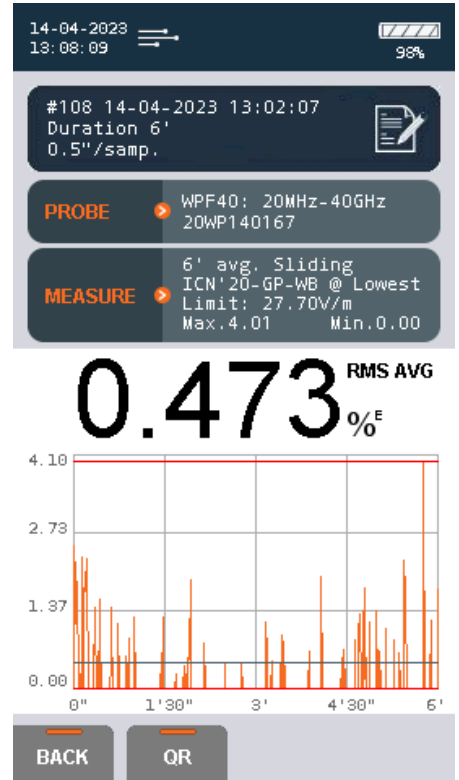

Measurement information

Location	New Harbours
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	14/04/2023 12:52:30.0
Final time	14/04/2023 12:58:29.5
Measurement time	0:05:59.5
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	5.534
Maximum	22.53
Minimum	2.057



Screenshot

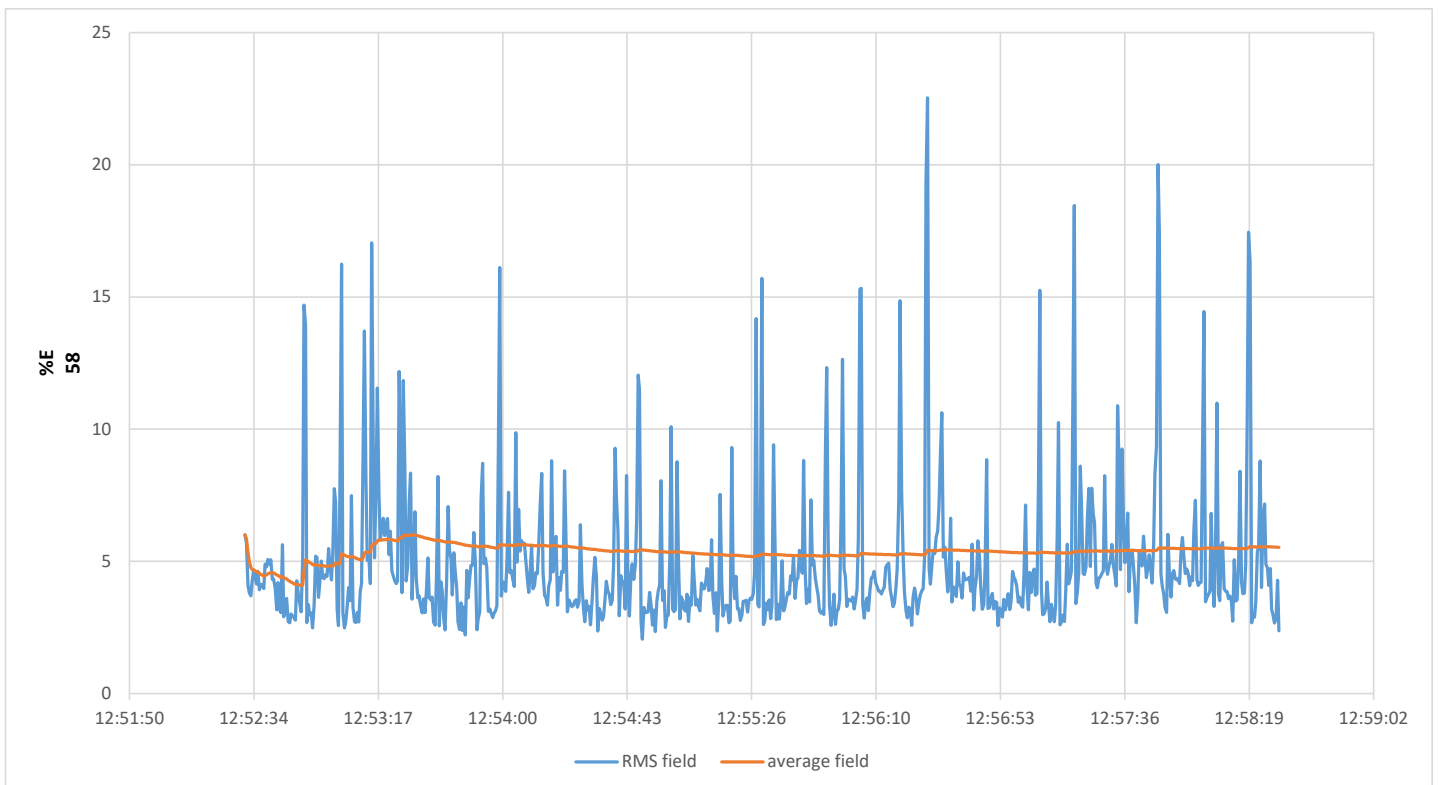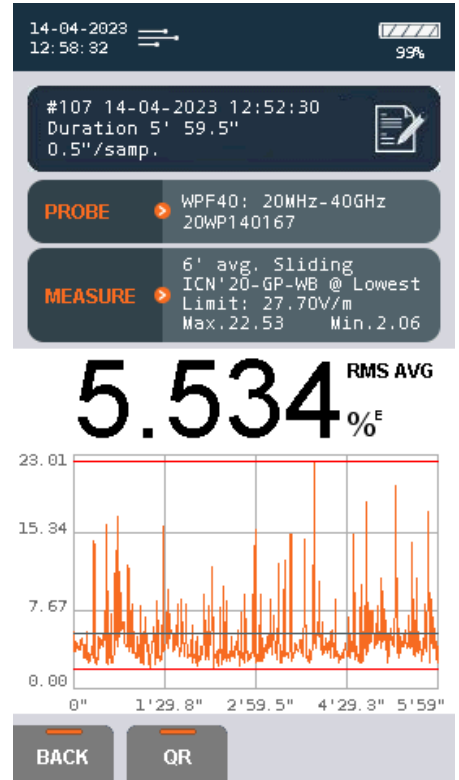

Measurement information

Location	Atlantic Suites
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	17/04/2023 14:14:27.0
Final time	17/04/2023 14:20:26.5
Measurement time	0:05:59.5
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	0.9537
Maximum	8.11
Minimum	0



Screenshot

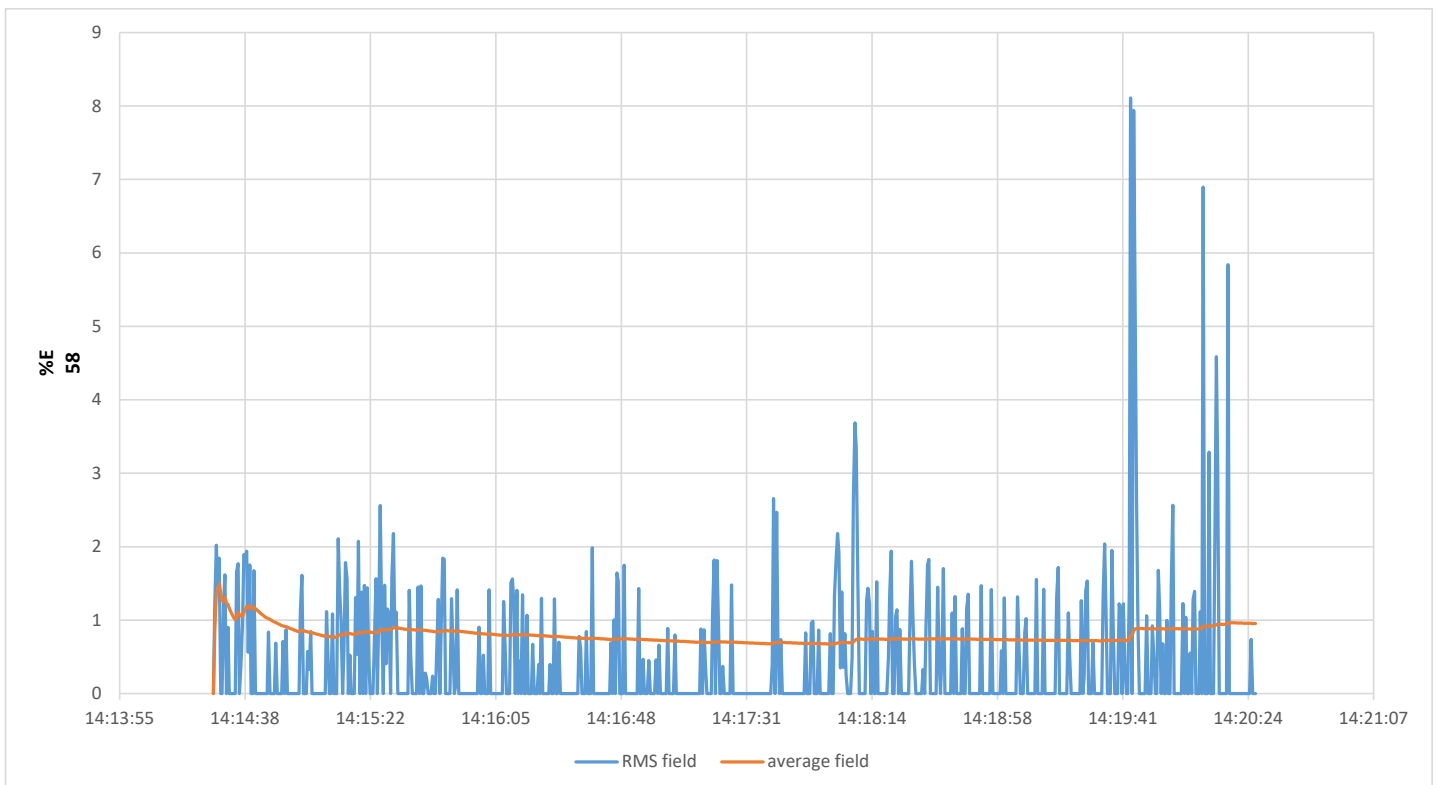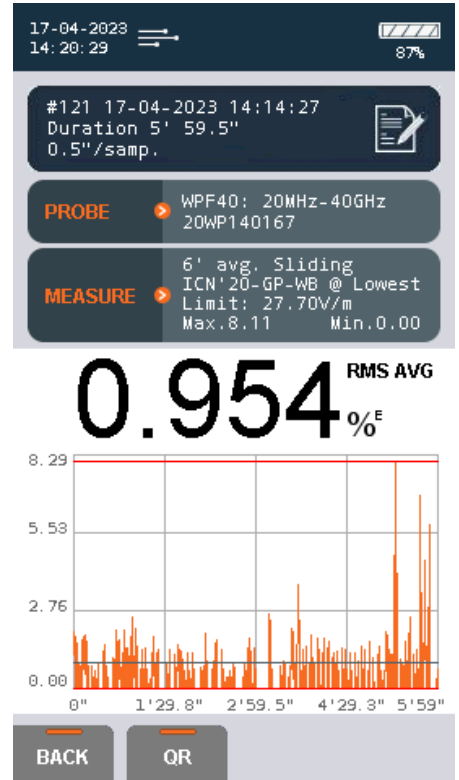

Measurement information

Location	ICC
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	17/04/2023 13:58:56.0
Final time	17/04/2023 14:04:56.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	5.363
Maximum	6.616
Minimum	4.343



Screenshot

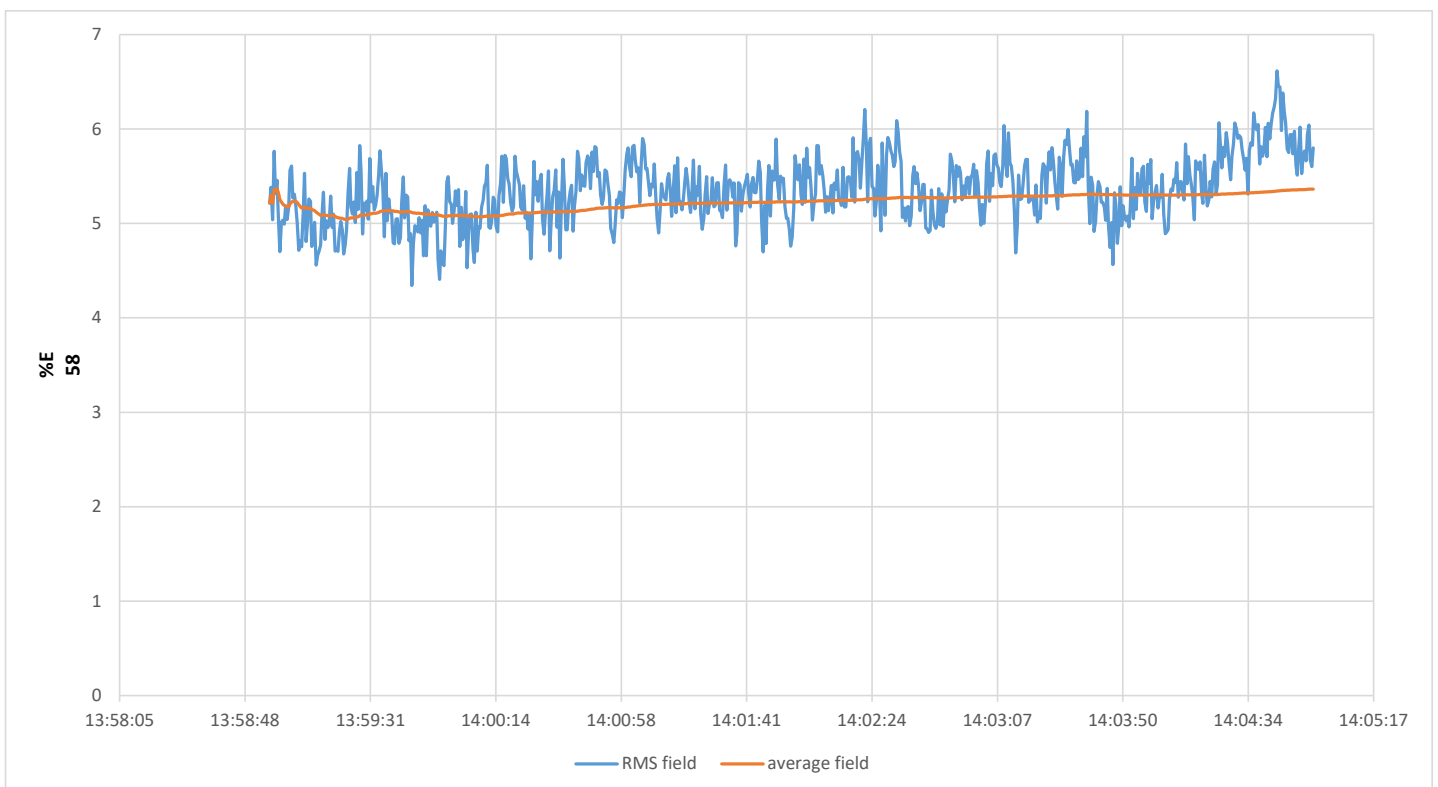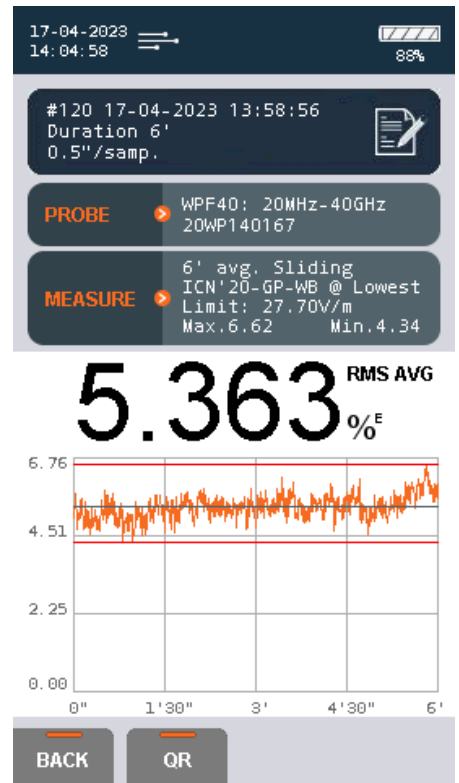

Measurement information

Location	Law Courts
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	17/04/2023 13:40:10.0
Final time	17/04/2023 13:46:10.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	5.168
Maximum	6.568
Minimum	4.018

Screenshot

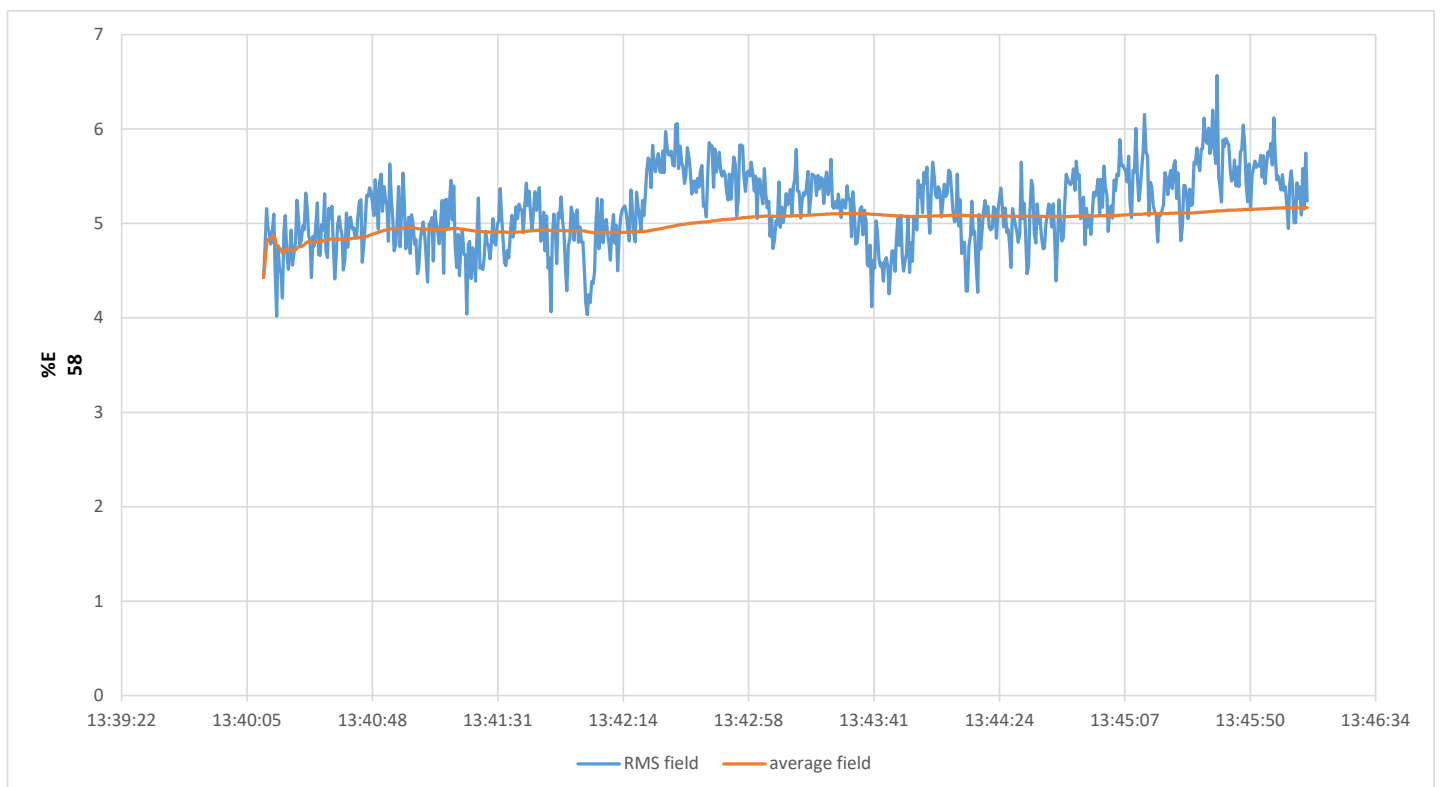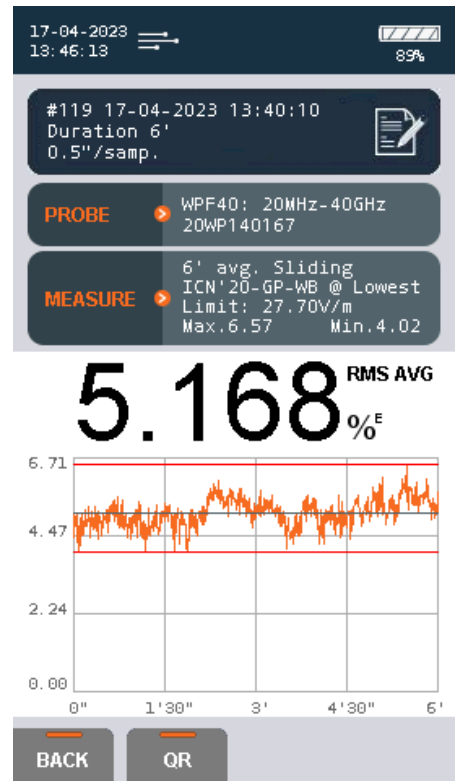

WAVECONTROL

Safety, Quality, Service

Measurement information

Location	Haven
Software version	1.8.0.0
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe frequencies	20MHz-40GHz
Initial time	17/04/2023 13:26:33.0
Final time	17/04/2023 13:32:32.5
Measurement time	0:05:59.5
Average interval	6m
Average type	sliding
Limit	58
Limit value	27.7 V/m
Units	%E
Last average	5.905
Maximum	8.029
Minimum	4.554

Screenshot

