



RADIO EMISSION ELECTROMAGNETIC FIELD (EMF) SPOT MEASUREMENTS

Under the Communications Act 2006, the GRA is responsible for the management of the radio spectrum in Gibraltar. This includes ensuring that all licensed and licence-exempt radio transmitters comply with guidelines adopted by the International Commission on Non-Ionizing Radiation Protection (“ICNIRP”). This standard has been adopted by His Majesty’s Government of Gibraltar and provides the basis by which the GRA measures the power levels in respect of electromagnetic fields (“EMF”), emitted by the various transmitters around Gibraltar. These transmitters include mobile telephony antennas, radio and TV transmitters, as well as fixed communication links which connect multiple sites via radio.

EMFs are measured in units called volts per meter (“V/m”) and the higher the measurement, the stronger the EMF. For preliminary site audits, the GRA conducts measurements at locations with clear line of sight to known sources of EMF such as mobile base stations. The location nearest these sources that are accessible by the public is chosen as a starting point. If the measured levels are high but still within the ICNIRP guidelines, a subsequent test is conducted as close as practicable to the transmitter to ensure compliance. If the levels are in excess of the ICNIRP guidelines, the operators in the area are notified immediately to power off so that a detailed investigation using high end spectrum analysers can be conducted in the area.

Initial measurements are taken using a SMP2 “Electromagnetic Meter” with a WPF40 probe (antenna). In line with ICNIRP recommendations, the SMP2 is pre-programmed to measure all frequencies in the tuneable range of the probe (20 MHz – 40 GHz¹) for a period of 6 minutes.

The ICNIRP standard upper limit for the frequency range 20 MHz to 40 GHz is 27.5 V/m and this denotes a level under which EMF is considered compliant. For ease of reference, the SMP2 displays the information as a percentage of field strength compared to the ICNIRP guidelines denoted by %E where “E” is electric field strength in V/m. i.e. a value of 10%E = 2.75 V/m. The final result is the average of over 2000 measurements taken over a sample period of 6 minutes.

Please note that the radio spectrum is continually changing, and these measurements only provide information on the radio frequency conditions for the specific locations at the time of monitoring.

The GRA will endeavour, subject to workloads and the availability of appropriate resources, to carry out and report EMF spot measurements on a weekly basis.

For further information, please visit the GRA website at <https://www.gra.gi/communications/spectrum-use/emf-monitoring>

¹ The frequency range 20 MHz – 40 GHz encompasses all radio spectrum currently used in Gibraltar for mobile telephony as well as broadcasting TV/Radio stations, Radar, WiFi and other commonly used technologies.

Site Audit Conclusion: 13/FEB/2023



Measurements conducted reflect the EMF at the prevailing locations were all well within the ICNIRP guidelines. No follow up investigation in the locations below was required.

Location	Date	Average Measurement	
Bayside / Westside School	13/02/2023	7.060	%E
Grand Parade	13/02/2023	9.093	%E
Victoria Stadium North Parking	13/02/2023	6.900	%E
Bayside / Westside School	13/02/2023	8.249	%E

Measurement information

Location	Bayside / Westside School
Software version	1.13.0.6
SMP2 serial	20SN1321
SMP2 firmware	1.82
Probe serial	20WP140167
Probe model	
Probe frequencies	20 MHz - 40 GHz
Initial time	13/02/2023 15:35:41.0
Final time	13/02/2023 15:41:41.0
Measurement time	0:06:00
Average interval	6m
Average type	sliding
Limit	20-General public-whole body
Limit value	27.7 V/m
Units	%E
Last average	7.06
Maximum	18.31
Minimum	5.637

Screenshot

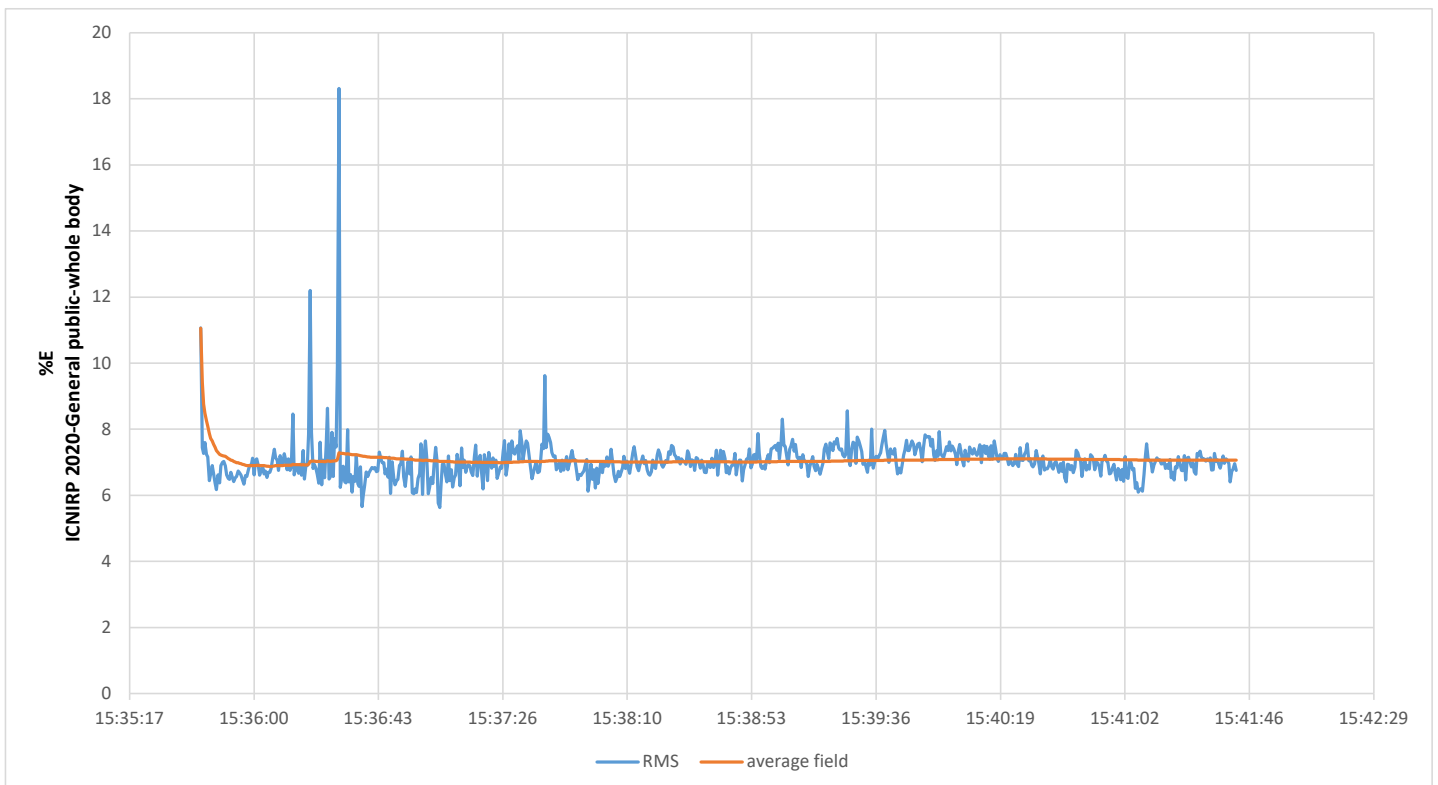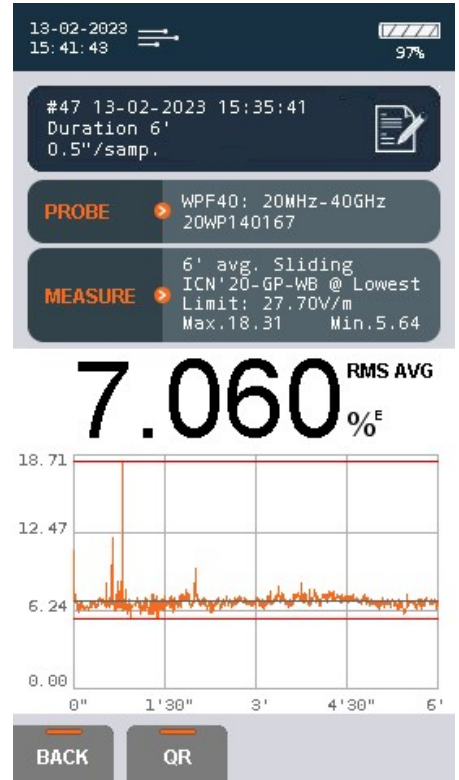



Measurement information

Location **Grand Parade**
Software version **1.13.0.6**
SMP2 serial **20SN1321**
SMP2 firmware **1.82**
Probe serial **20WP140167**
Probe model
Probe frequencies **20 MHz - 40 GHz**
Initial time **13/02/2023 15:16:16.0**
Final time **13/02/2023 15:22:16.0**
Measurement time **0:06:00**

Average interval **6m**
Average type **sliding**
Limit **20-General public-whole body**
Limit value **27.7 V/m**

Units **%E**
Last average **9.093**
Maximum **11.21**
Minimum **7.671**

Screenshot

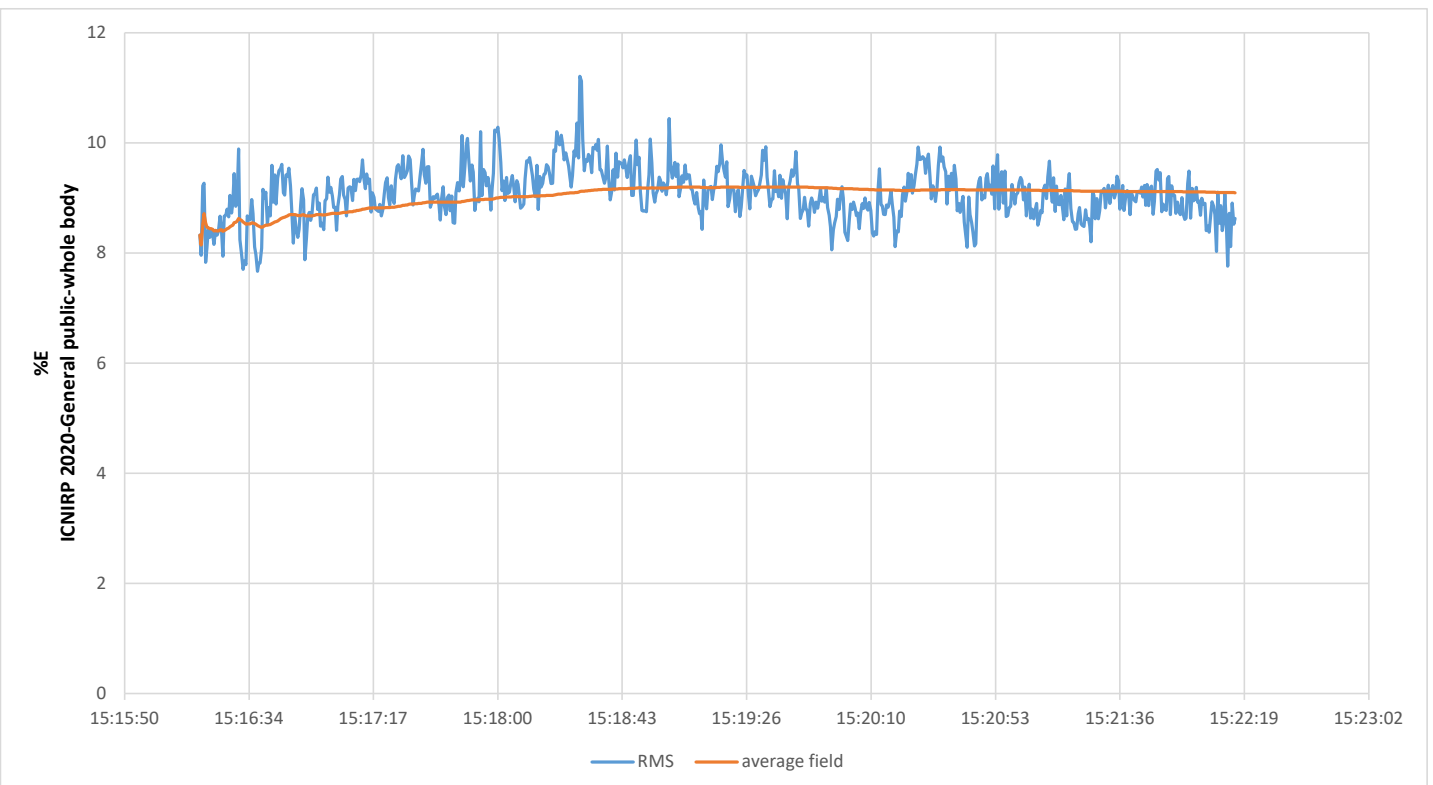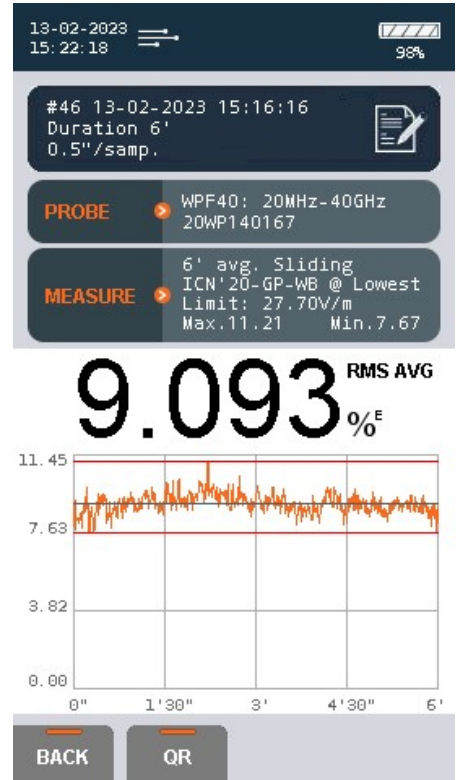



Measurement information

Location: Victoria Stadium North Parking
Software version: 1.13.0.6
SMP2 serial: 20SN1321
SMP2 firmware: 1.82
Probe serial: 20WP140167
Probe model:
Probe frequencies: 20 MHz - 40 GHz
Initial time: 13/02/2023 14:56:02.0
Final time: 13/02/2023 15:02:01.5
Measurement time: 0:05:59.5

Average interval: 6m
Average type: sliding
Limit: 20-General public-whole body
Limit value: 27.7 V/m

Units: %E
Last average: 6.9
Maximum: 10.87
Minimum: 5.916

Screenshot

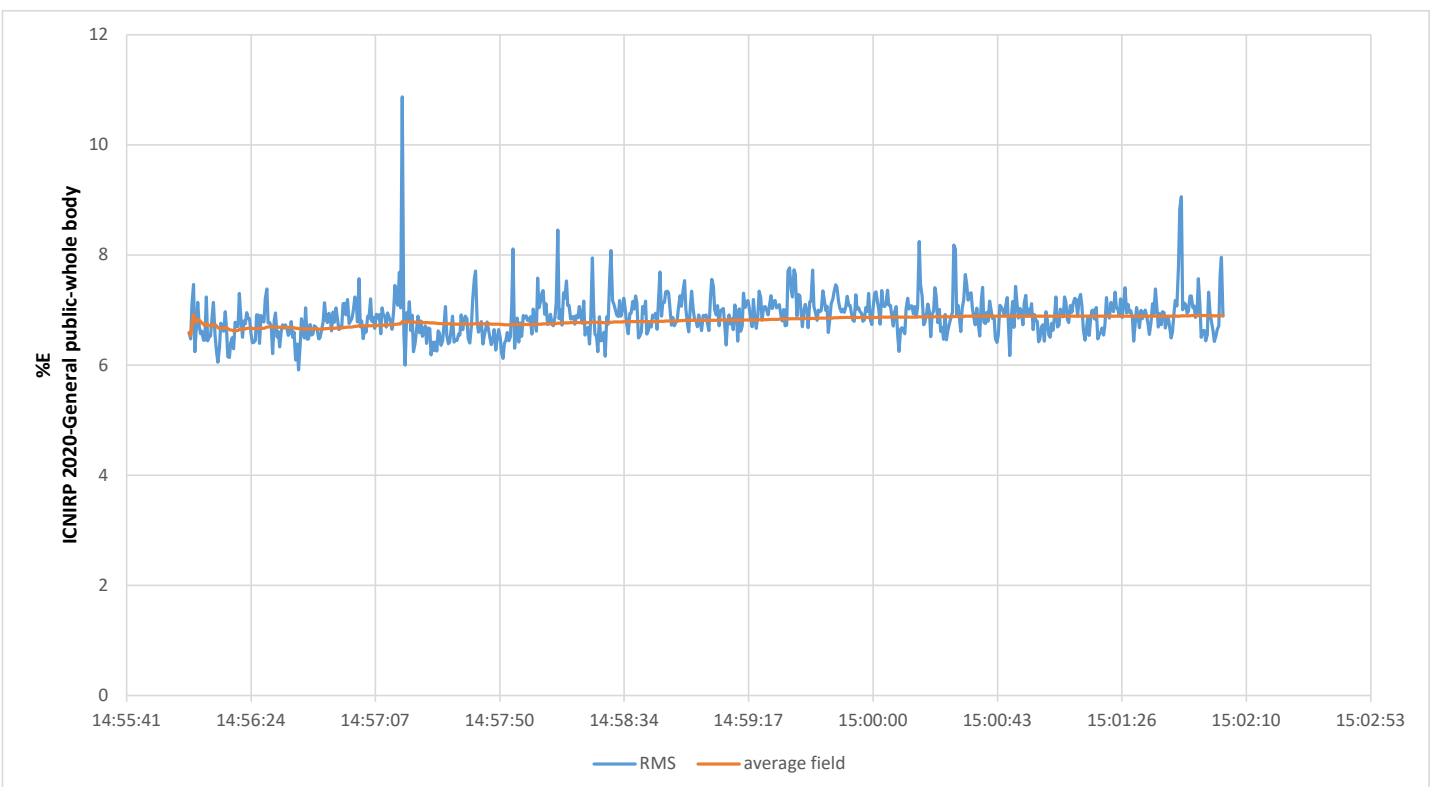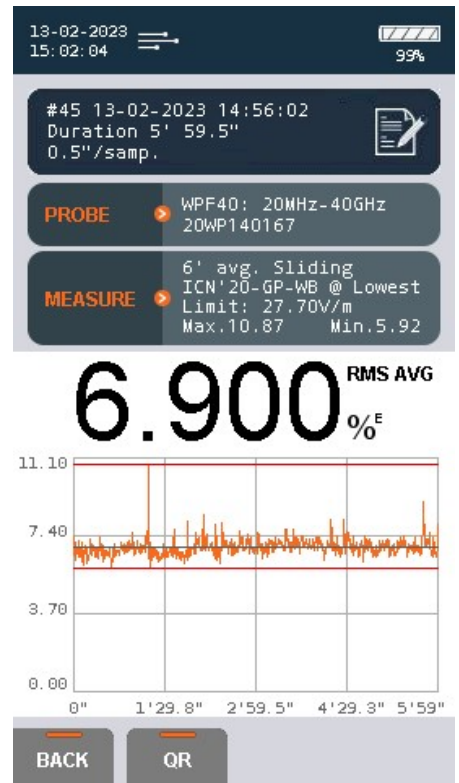

Measurement information

Location Bayside / Westside School
Software version 1.13.0.6
SMP2 serial 20SN1321
SMP2 firmware 1.82
Probe serial 20WP140167
Probe model
Probe frequencies 20 MHz - 40 GHz
Initial time 13/02/2023 14:42:12.0
Final time 13/02/2023 14:48:12.0
Measurement time 0:06:00

Average interval 6m
Average type sliding
Limit 20-General public-whole body
Limit value 27.7 V/m

Units %E
Last average 8.249
Maximum 14.31
Minimum 6.79

Screenshot

